

**COATS**<sup>®</sup>

## Delivering Value, Versatility and Rugged Reliability

### HIT6000

The Coats Model 6000 Tire Changer is designed for servicing tubeless tires. It can change tubeless truck tires in a matter of minutes with the use of adapters, as well as loosen tube-type tire beads.


- Handles wheel widths 6"-15" and diameters of 16.5" to 24.5".
- Changes all 15-degree single piece highway rims, including demountable Dayton wheels, reverse disc Budd wheels and stand disc wheels.
- One control stick for pivoting the tabletop and clamping the rim chuck
- Bead loosening, mounting and demount are activate by dedicated two way pedals



### HIT5000 & HIT9000

These heavy duty changers can accommodate tube or tubeless tires with rim diameters from 15" to 38" (5000) and 15" to 44" (9000)

- Easy to use swing arm houses all hydraulic controls, with a dedicated lever for each powered function
- Self centering hydraulic clamping chuck
- Adjustable pressure regulator ensures proper matching of chuck pressure to rim strength
- Heavy tapered roller bearings and dual direction hydraulic motor provide smooth torque
- Roller type tire spreader standard

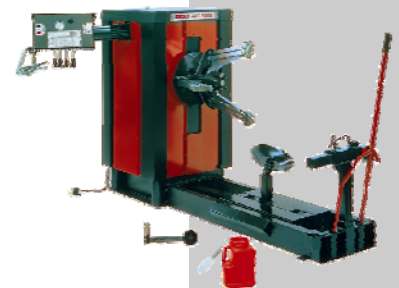

# HEAVY-DUTY INDUSTRIAL TIRE (HIT) SERIES

## TIRE CHANGER SPECIFICATIONS

	HIT 6000	HIT 5000	HIT 9000
Operation	Lay back, center mount	3 Jaw Chuck	
Wheel Handled	Budd & Dayton Tubeless	Budd & Dayton, Tube & Tubeless	
Mount Demount	Center Post	Independent Hook & Roller	
Tool head Offset	Independent removable, mount in table	Independent removable, mount in table	
Table	Lay back	Moving table centered in frame	
Wheel Clamping Method	Lay back, center mount	3 Jaw Chuck	
Wheel Lift	Tilt back	Clamp Arm Lifting	
Frame Structure	Tilt Table	Center Carriage	
Max. Tire Diameter	44"	76"	
Max. Tire Width	16"	25"+	
Rim Diameter Range	16.5"-24.5"	15"-38"	15"-44"
Electric Specifications	220v / 1ph or 220v / 3ph, 60Hz		220v / 1ph or 220v / 3ph, 60Hz
Air Required	Yes	No	
Max. Chuck Torque	2900 ft/lbs	2900 ft/lbs	4400 ft/lbs
Max. Overall Dimension		96"(w)x108"(d)x66"(h)	96"(w)x108"(d)x66"(h)
Weight with Standard Accessories (shipping)	1150 lbs	1400 lbs	1600 lbs


## ACCESSORIES

		5000	9000	6000
Five Foot Pry Bar	8120334	S	S	S
Lube Bucket	8120347	S	S	S
Lube Applicator	8120366	S	S	S
Earth Mover Bead Loosener Roller Shaft	7110652	S	S	S
Tubeless Tire Iron	7109342	S	S	S
Lock Ring Iron	7109343	S	S	S
Drop Center Iron	7109344	S	S	S
Bead Starting Tool	7109345	S	S	S
Vise Grip	7109346	S	S	S
Stud piloted Budd Wheel Plate	7110853	S	S	S
Extension Clamps, Add 6" dia.	7110843	O	S	N/A
Portable Ramp	7110842	O	S	N/A
Tractor Tire Combo Tee	7110851	O	S	N/A
Offset Roller Assembly for wider applications	7110852	O	O	N/A
Hub Piloted Budd Wheel Plate	8183803	O	O	N/A
Nylon Head Combo Tool	8183945	N/A	N/A	O
Nylon Replacements	8183950	N/A	N/A	O
Duplex Combo Tool Head	8120564	N/A	N/A	O

7110852




8183803



7110851



7110842



7110843



S = STANDARD, O = OPTIONAL N/A = NOT APPLICABLE

# COATS®

**HENNESSY INDUSTRIES, INC.**

MKT00051

Manufacturer of Ammco®, Coats® and BADA® Automobile Service Equipment, Tools and Accessories  
 1601 J.P. Hennessy Drive, LaVergne, TN 37086-3565 800-688-6496 or 615-641-7533  
**Hennessy Canada:** 2430 Lucknow Drive, Unit 9, Mississauga, Ontario, L5S 1V3 905-672-9440  
[www.ammcoats.com](http://www.ammcoats.com)

REV 08/09