

# CL Challenger Lifts



**Model#: 15002**  
Heavy-Duty 2-Post Lift  
15,000 lb. capacity

## Heavy-Duty 2-Post Lifts

Whether you want to expand your fleet service capabilities, avoid downtime or just increase your bottom line, Challenger Lifts' 12,000, 15,000 and 18,000 lb. 2-post lifts are the solutions for your servicing needs. Not only does our Heavy-Duty Series lift a lot, it's a lot of lift. With features that you would expect to pay more for, like low profile arms, padded overhead cut-off bar, adapter accessories, etc. In fact, no other lift company gives you more.


Model Number	12000	12001	12002	15000	15002	18000	18002
Lifting Capacity	12,000 lb. (5442kg)	12,000 lb. (5442kg)	12,000 lb. (5442kg)	15,000 lb. (6803kg)	15,000 lb. (6803kg)	18,000 lb. (8163kg)	18,000 lb. (8163kg)
Rise Height*	84 <sup>3</sup> / <sub>4</sub> (2153mm)			85 <sup>1</sup> / <sub>2</sub> (2172mm)		85 <sup>1</sup> / <sub>2</sub> (2172mm)	
Height Overall	13' 8" (4166mm)	14' 8" (4470mm)	15' 8" (4775mm)	14' 6" (4420mm)	16' 6" (5029mm)	14' 6" (4420mm)	16' 6" (5029mm)
Width Overall	11' 10" (3607mm)			12' 10 <sup>3</sup> / <sub>4</sub> " (3931mm)		12' 10 <sup>3</sup> / <sub>4</sub> " (3931mm)	
Drive-Thru Clearance	104 <sup>1</sup> / <sub>2</sub> " (2654mm)			106 <sup>3</sup> / <sub>4</sub> " (2711mm)		106 <sup>3</sup> / <sub>4</sub> " (2711mm)	
Floor-Overhead Switch	13' 1" (3988mm)	14' 1" (4293mm)	15' 1" (4597mm)	13' 11" (4242mm)	15' 11" (4851mm)	13' 11" (4242mm)	15' 11" (4851mm)
Arm Reach (Min.)	37" (940mm)			38 <sup>1</sup> / <sub>2</sub> " (978mm)		38 <sup>1</sup> / <sub>2</sub> " (978mm)	
Arm Reach (Max.)	54" (1372mm)			62" (1575mm)		62" (1575mm)	
Screw Pad Height	5" - 6 <sup>3</sup> / <sub>4</sub> " (127 - 171mm)			6 <sup>1</sup> / <sub>4</sub> " - 8 <sup>1</sup> / <sub>2</sub> " (159 - 216mm)			
Medium Extension	8" - 9 <sup>3</sup> / <sub>4</sub> " (203 - 248mm)			10 <sup>1</sup> / <sub>4</sub> " - 12 <sup>1</sup> / <sub>2</sub> " (260 - 318mm)			
High Extension	11" - 12 <sup>3</sup> / <sub>4</sub> " (279 - 324mm)			14 <sup>1</sup> / <sub>4</sub> " - 16 <sup>1</sup> / <sub>2</sub> " (362 - 419mm)			
Inside Columns	114 <sup>1</sup> / <sub>2</sub> " (1575mm)			120" (3048mm)		120" (3048mm)	
Air Supply Required	85-115 psi			85-115 psi		85-115 psi	
Motor	2HP			2HP		2HP	
Voltage (1 Phase Std.)**	208v-230v			208v-230v		208v-230v	
Speed of Rise	60 Sec.			80 Sec.		80 Sec.	
Ceiling Height Required	13' 9" (4191mm)	14' 9" (4496mm)	15' 9" (4801mm)	14' 7" (4445mm)	16' 7" (5055mm)	14' 7" (4445mm)	16' 7" (5055mm)

\* Rise height is measured with adjustable screw pads in highest position.

\*\* Optional 3 phase electrical also available, please specify at time of order.  
Standard lift colors are Red and Blue


For more information, contact your Authorized Challenger Lifts Distributor.

**standard features:**

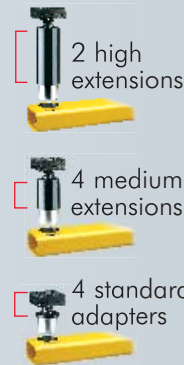

Our single push button power unit raises lift and a release valve handle lowers it.

Challenger's arm restraints automatically disengage when lift is fully lowered for easy positioning of arms and securely engage when lift is raised.



Technicians can disengage both columns at the same time with our single-point air actuated lock release.

Optional Air/Electric workstation (Part#: B10264)

Our single piece adapter organizer prevents adapters from being misplaced.



The Automotive Lift Institute (ALI) certifies the Heavy-Duty 2-Post Lifts (12000, 15000, and 18000 Series) described herein comply with the applicable provisions of the American National Standards ANSI/ALI ALCTV 1998 and are Third Party Validated by the ETL Testing Laboratory.

GSA CONTRACT # GS-07F-89500 • CAGE CODE OKD44  
SIN#'s 253-23, 253-23A, 253-38 • DUNS# 79-435-3680

**CHALLENGER LIFTS, INC.**  
200 Cabel Street  
Louisville, Kentucky 40206

Phone Toll-Free: 800-648-5438  
502-625-0700  
Fax: 502-625-0711

E-mail: sales@challengelifts.com

Challenger Lifts, Inc. reserves the right to make changes to specifications without notice and without making changes retroactive. Unloading, installation and oil not included.